

Compatible with 20+ Mainstream Brand of Global Inverter



20 inverter protocols can be selected on the display




Communication protocol customization



Support 15 in parallel



Ultra slim design

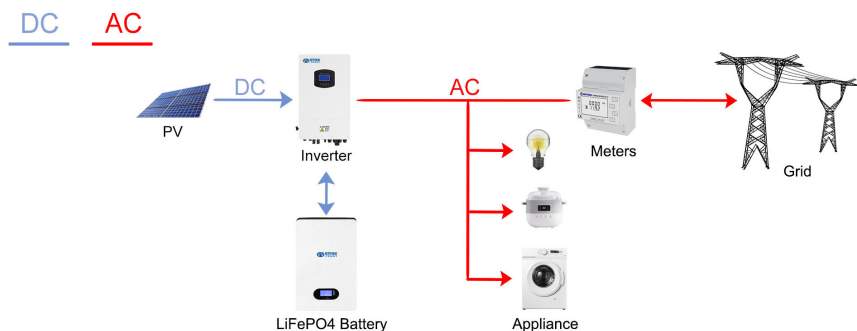

Model	JC-WM51100A-T1	JC-WM51100A-A1	JC-WM51200A-A1
Battery Style	48/51.2V100AH	48/51.2V100AH	48/51.2V200AH
Energy	5.12KWh	5.12KWh	10.24KWh
Nominal Voltage	48/51.2V	48/51.2V	48/51.2V
Rated Capacity	100Ah	100Ah	200Ah
End-of-charge Voltage	54.0V/58.0V		
End-of-discharge Voltage	39.0/42.0V		
Standard Charge Current	50A		
Max. Charge Current	100A		
Standard Discharge Current	100A		
Max. Discharge Current	100A	100/200A	100/200A
Max. Peak Current	200A		
Charge/ Discharge Interface	Quick plug terminal/ M8 Terminal		
Communication	RS485-1/ RS485-2		
Communication Interface	RS485/ CAN		
Shell Material/ Color	Metal/ White		
Size	770*520*90mm	590*410*145mm	850*466*145mm
Weight	42/44Kg	43/45Kg	90/92Kg
Work Temperature Range	Charge: -10°C-55°C Discharge: -30°C-60°C		

*THE PARAMETERS ARE FOR REFERENCE ONLY, THE ACTUAL PRODUCT SHALL PREVAIL, SUPPORT CUSTOMIZATION, AND ON-DEMAND CUSTOMIZATION